

**WORK ORDER No. 13**  
**RFQ 2022 - 13 Milling, Resurfacing, and Striping Construction Services**

TO: H & J Asphalt, Inc.  
4310 NW 35<sup>th</sup> Avenue  
Miami, FL 33142

DATE: January 10, 2024

The City of Doral authorizes the firm of H&J Asphalt, Inc. to proceed with the provision of Milling, Resurfacing, and Striping along NW 102<sup>nd</sup> Avenue between NW 58<sup>th</sup> Street and approximately NW 60<sup>th</sup> Street. Where H&J Asphalt, Inc. is a pre-qualified provider of Construction Services selected in accordance with RFQ 2022-13 requirements and approved by the City Council on August 9, 2022, through Resolution 22-145. The work shall be performed in accordance with the contract provisions contained in the Construction Services Agreement between H&J Asphalt, Inc. and the City of Doral dated August 9, 2022, and the attached Proposal submitted on December 13, 2023, submitted by your firm for the above referenced project.

**SCOPE OF SERVICES AND SCHEDULE:**

The scope of the project will be as described in the attached proposal from H&J Asphalt, Inc. submitted on December 13, 2023. The schedule requires the work to be performed within 30 calendar days from NTP. All limitations of time set forth in this Work Order are of the essence. The performance of services associated with this Work Order will be executed based on the schedule of values submitted by H&J Asphalt, Inc. with a not to exceed amount of \$149,882.70, which includes a 10% contingency amount for any unforeseen conditions.

You are required by the Continuing Construction Agreement to begin work subsequent to the execution of this Work Order, or as directed otherwise. If you fail to begin work subsequent to the execution of this Work Order, the City of Doral will be entitled to disqualify the Proposal and revoke the award. Work Order incorporates the terms and conditions set forth in the Continuing Construction Agreement dated August 9, 2022, between the parties as though fully set forth herein. In the event that any terms or conditions of this Work Order conflict with the Continuing Construction Agreement, the provisions of this specific Work Order shall prevail and apply.

This Work Order is not binding until the City of Doral agrees and approves this Work Order.

IN WITNESS WHEREOF, the parties hereto have executed this Agreement on the day and date first above written, in two (2) counterparts, each of which shall, without proof or accounting for the other counterpart be deemed an original Contract.

CONTRACTOR: H&J Asphalt, Inc.

WITNESSES:

SEAL:

BY: [Signature]  
NAME: Humberto Lopez  
TITLE: President

1. [Signature]  
2. [Signature]

OWNER: City of Doral

AUTHENTICATION:

BY: [Signature]  
NAME: Barbara Hernandez  
TITLE: City Manager

BY: [Signature]  
NAME: Connie Diaz  
TITLE: City Clerk

APPROVED AS TO FORM AND LEGAL SUFFICIENCY FOR THE SOLE USE OF THE CITY OF DORAL:

BY: [Signature]  
NAME: Valerie Vicente, Esq.  
TITLE: Nabors, Giblin & Nickerson, P.A.  
City Attorney

**CONTRACT PLANS COMPONENTS**

ROADWAY PLANS


**INDEX OF ROADWAY PLANS**

SHEET NO. \_\_\_\_\_

SHEET DESCRIPTION

- C-1 KEY SHEET
- C-2 SUMMARY OF QUANTITIES
- C-3 GENERAL NOTES
- C-4 TO C-5 ROADWAY PLANS
- C-6 TO C-7 SIGNING AND PAVEMENT MARKING PLANS

**CONTRACT PLANS**



**MILLING AND RESURFACING FOR NW 102 AVE.  
FROM NW 58 ST. TO NW 62 ST.  
CITY OF DORAL  
MIAMI-DADE COUNTY**

**CITY COUNCIL**

MAYOR  
Christi Fraga

VICE MAYOR  
Rafael Pineyro


COUNCILMAN  
Oscar Fung-Corve

COUNCILWOMAN  
Maureen Porras

COUNCILWOMAN  
Digna Cabral

**LENGTH OF PROJECT**

ROADWAY	566
LINEAR FEET	0.1053
MILES	

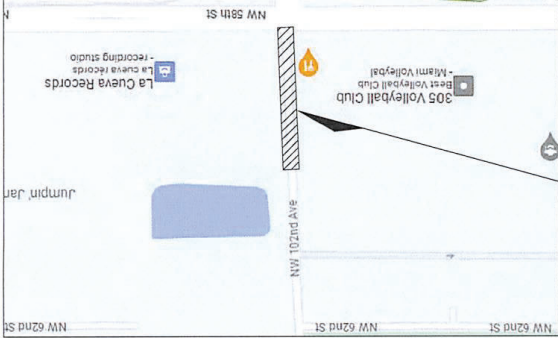

PROJECT LOCATION

**PLANS PREPARED BY:**

ROADWAY SHOP DRAWINGS  
MARLIN ENGINEERING, INC.  
3633 W COMMERCIAL BLVD - SUITE 115  
FT. LAUDERDALE, FLORIDA 33309

PLANS PREPARED BY:  
PUBLIC WORKS DEPARTMENT  
CITY OF DORAL  
8401 NW 53RD TERRACE, 2ND FLOOR  
DORAL, FLORIDA 33166

PREPARED FOR  
Rafael A. Lagos, P.E. No. 51412  
MARLIN ENGINEERING, INC.  
3633 W COMMERCIAL BLVD - SUITE 115  
FT. LAUDERDALE, FLORIDA 33309

**PROFESSIONAL ENGINEER**

STATE OF FLORIDA

NO. 51412

**Rafael A. Lagos**


DATE: 2023.11.15 16:30-0500

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY RAFAEL A. LAGOS

PRINTED COPIES OF THIS DOCUMENT ARE ON THE DATE ADJACENT TO THE SEAL AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

**PROJECT LOCATION:**

<http://tinyurl.com/2p8a2dd>

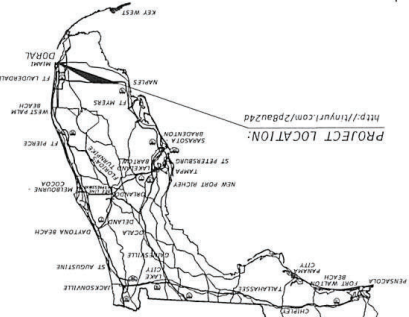

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-33.004, F.A.C.

CONTRACT DOCUMENTS.  
SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION DATED 2023-24, AS AMENDED BY THE  
DEPARTMENT OF TRANSPORTATION FY 2023-2024 STANDARD PLANS AND STANDARD  
FOR DESIGN, CONSTRUCTION AND MAINTENANCE FOR STREETS AND HIGHWAYS, THE FLORIDA  
STANDARDS AND SPECIFICATIONS PART 1, 2 AND 3 THE MANUAL OF MINIMUM STANDARDS  
THE CITY OF DORAL STANDARDS, MIAMI-DADE COUNTY PUBLIC WORKS DEPARTMENT


THESE PLANS HAVE BEEN PREPARED IN ACCORDANCE WITH AND ARE GOVERNED BY

SUMMARY OF PAY ITEMS						
PAY ITEM NO.	DESCRIPTION	UNIT	COMPONENT			
			ROADWAY		SPM	
			PLAN	PIRAL	PLAN	PIRAL
0101 1	MOBILIZATION	LS	1			
0102 1	MAINTENANCE OF TRAFFIC	LS	1			
134 13	INLET PROTECTION SYSTEM	EA	4			
0107 1	LITTER REMOVAL	AC	0.37			
0327 7D 12	MILLING EXIST ASPH PAVT, 1.25" AVG DEPTH	SY	3339			
0337 7.62	ASPHALT CONCRETE FRICTION COURSE, TRAFFIC C, FC-4.5, PG 78-22	TN	236.0			
033 2 12	CONDUIT, FURNISH & INSTALL, DIRECTIONAL BORE	LF			10	
060 1 109	LOOP DETECTOR INDUCTIVE, FBI, TYPE 9	EA			2	
060 2 106	LOOP ASSEMBLY, FBI, TYPE F	AS			3	
0700 1 60	SINGLE POST SIGN REMOVE	AS			1	
0705 11 1	DELINEATOR, FLEXIBLE TUBULAR, YELLOW	EA			23	
0706 1 3	RAISED PAVEMENT MARKER, TYPE B	EA			193	
0710 11 170	PAINTED PAVEMENT MARKINGS, STANDARD, POSTS, ARROW	EA			0	
0710 11 224	PAINTED PAVEMENT MARKINGS, STANDARD, YELLOW, SOLID, 1" FOR DIAGONAL OR CHEVRON	LF			67	
0710 11 241	PAINTED PAVEMENT MARKINGS, STANDARD, YELLOW, 2-4 DOTTED GUIDE LINE #8-10 DOTTED EXTENSION LINE, 6"	GM			0.070	
0710 11 101	PAINTED PAVEMENT MARKINGS, STANDARD-OTHER SURFACES, WHITE, SOLID, 6"	GM			0.358	
0710 11 125	PAINTED PAVEMENT MARKINGS, STANDARD-OTHER SURFACES, WHITE, SOLID, 24"	LF			35	
0710 11 131	PAINTED PAVEMENT MARKINGS, STANDARD-OTHER SURFACES, WHITE, SKIP, 6", 10-30 SKIP OR 3-4 LANE DROP	GM			0.190	
0710 11 201	PAINTED PAVEMENT MARKINGS, STANDARD-OTHER SURFACES, YELLOW, SOLID, 6"	GM			0.317	
0710 11 231	PAINTED PAVEMENT MARKINGS, STANDARD-OTHER SURFACES, YELLOW, SKIP, 6", 10-30 SKIP	GM			0.054	
0711 11 110	THERMOPLASTIC, STANDARD, WHITE, ARROW	EA			0	
0711 11 224	THERMOPLASTIC, STANDARD, YELLOW, SOLID, 1" FOR DIAGONAL OR CHEVRON	LF			67	
0711 11 241	THERMOPLASTIC, STANDARD, YELLOW, 2-4 DOTTED GUIDE LINE #8-10 DOTTED EXTENSION LINE, 6"	GM			0.070	
0711 11 101	THERMOPLASTIC, STANDARD-OTHER SURFACES, WHITE, SOLID, 6"	GM			0.358	
0711 11 125	THERMOPLASTIC, STANDARD-OTHER SURFACES, WHITE, SOLID, 24"	LF			35	
0711 11 131	THERMOPLASTIC, STANDARD-OTHER SURFACES, WHITE, SKIP, 6", 10-30 SKIP OR 3-4 LANE DROP	GM			0.190	
0711 11 201	THERMOPLASTIC, STANDARD-OTHER SURFACES, YELLOW, SOLID, 6"	GM			0.317	
0711 11 231	THERMOPLASTIC, STANDARD-OTHER SURFACES, YELLOW, SKIP, 6", 10-30 SKIP	GM			0.054	

11/16/2023 2:04:44 PM 4044  
 C:\USERS\WKS\KLETT\75\757\757020044\004\summary18.rpt

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION

**MARLIN**  
 ENGINEERING  
RAFAEL A. LAGOS, P.E. No. 51432  
 3363 W Commercial Blvd., Ste. 110 Ft Lauderdale, FL 33309  
 (954) 870-5550 • C.A. No. 6104



**SUMMARY OF QUANTITIES**

SHEET NO.  
**C-2**

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 68B5-23.004, F.A.C.

**PROJECT GENERAL NOTES:**

1. THE LOCATIONS OF THE UTILITIES SHOWN IN THE PLANS (INCLUDING THOSE DESIGNATED "V", "W", AND "U") ARE BASED ON THE RECORD DRAWINGS AND FIELD SURVEY DATA. THE VERIFIED LOCATIONS/ELEVATIONS APPLY ONLY AT THE POINTS SHOWN.

2. DAMAGED CURB AND GUTTER SHALL BE REPLACED FROM JOINT TO JOINT.

**TRAFFIC CONTROL PLANS NOTES:**

PERFORM LANE CLOSURES ONLY DURING NON-PEAK HOURS OR NON-EVENT DAYS/NIGHTS/WEEKENDS. NON-PEAK HOURS ARE FROM 9:00 AM TO 4:00 PM WEEKDAYS AND WEEKENDS.

**TRAFFIC CONTROL PHASE NOTES:**

PHASE 1 - MILLING & RESURFACING SOUTH BOUND INSIDE OR OUTSIDE LANE:  
 PLACE ALL TRAFFIC CONTROL DEVICES, TEMPORARY SIGNING AND PCMS NECESSARY TO CLOSE THE INSIDE OR OUTSIDE LANE IN ACCORDANCE TO FOOT STANDARD PLANS, INDEX NO. 102-613. PLACE PCMS AS INDICATED BELOW.  
 MAINTAIN PEDESTRIAN TRAFFIC DURING CONSTRUCTION.  
 PLACE TEMPORARY PAVEMENT MARKINGS.

PHASE 2 - MILLING & RESURFACING CENTER BOUND LANE:  
 PLACE ALL TRAFFIC CONTROL DEVICES, TEMPORARY SIGNING AND PCMS NECESSARY TO CLOSE THE CENTER LANE IN ACCORDANCE TO FOOT STANDARD PLANS, INDEX NO. 102-613. PLACE PCMS AS INDICATED BELOW.  
 PLACE TEMPORARY PAVEMENT MARKINGS.

PHASE 3 - FINAL MARKINGS:  
 PLACE ALL TRAFFIC CONTROL DEVICES, TEMPORARY SIGNING AND PCMS NECESSARY TO CLOSE ANY LANE IN ACCORDANCE TO FOOT STANDARD PLANS, INDEX NO. 102-613. PLACE PCMS AS INDICATED BELOW.  
 MAINTAIN PEDESTRIAN TRAFFIC DURING CONSTRUCTION.  
 PLACE FINAL PAVEMENT MARKINGS.

**ADVANCE CONSTRUCTION NOTICE:**

1. THE CONTRACTOR SHALL PROVIDE GENERAL INFORMATION SIGNS FOR THIS PROJECT AND LOCATE THEM APPROXIMATELY 500' IN ADVANCE OF THE FIRST ADVANCE WARNING SIGN OR AS CLOSE TO THE BEGINNING AND END OF THE CONSTRUCTION AND ON SIDE STREETS APPROACHING THE WORKZONE AS PRACTICAL IN ACCORDANCE WITH FOOT STANDARD PLANS INDEX 102-600, SHEET 5 OF 11.

2. FURNISH AND MAINTAIN PORTABLE CHANGING MESSAGE SIGNS (PCMS) AT EACH APPROACH TO THE WORKZONE AND OUTSIDE THE CLEAR ZONE.  
 MESSAGES FOR THE PCMS SHALL AS INDICATED BELOW OR AS DIRECTED BY THE ENGINEER.

**STARTING 2 WEEK PRIOR TO COMMENCEMENT OF CONSTRUCTION.**

**DURING CONSTRUCTION.**

"ROAD NAME" CONST	"ROAD NAME" CONST	"ROAD NAME" CONST
"BEGIN DATE" "WORKING HOURS"	"BEGIN DATE" "WORKING HOURS"	"BEGIN DATE" "WORKING HOURS"

"ROAD NAME" CONST	"ROAD NAME" CONST	"ROAD NAME" CONST
"BEGIN DATE" "WORKING HOURS"	"BEGIN DATE" "WORKING HOURS"	"BEGIN DATE" "WORKING HOURS"

"ROAD NAME" CONST	"ROAD NAME" CONST	"ROAD NAME" CONST
"BEGIN DATE" "WORKING HOURS"	"BEGIN DATE" "WORKING HOURS"	"BEGIN DATE" "WORKING HOURS"

"ROAD NAME" CONST	"ROAD NAME" CONST	"ROAD NAME" CONST
"BEGIN DATE" "WORKING HOURS"	"BEGIN DATE" "WORKING HOURS"	"BEGIN DATE" "WORKING HOURS"

REVISIONS		DESCRIPTION
DATE		




**MARLIN ENGINEERING**  
 RAFAEL A. LAGOS - P.E. No.: 51412  
 3343 W Commercial Blvd., Ste. 118 Ft. Lauderdale, FL 33309  
 1954 702-5659 • CA. No. 5104

**CITY OF DORAL**

**GENERAL NOTES**

SHEET NO. C-3

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

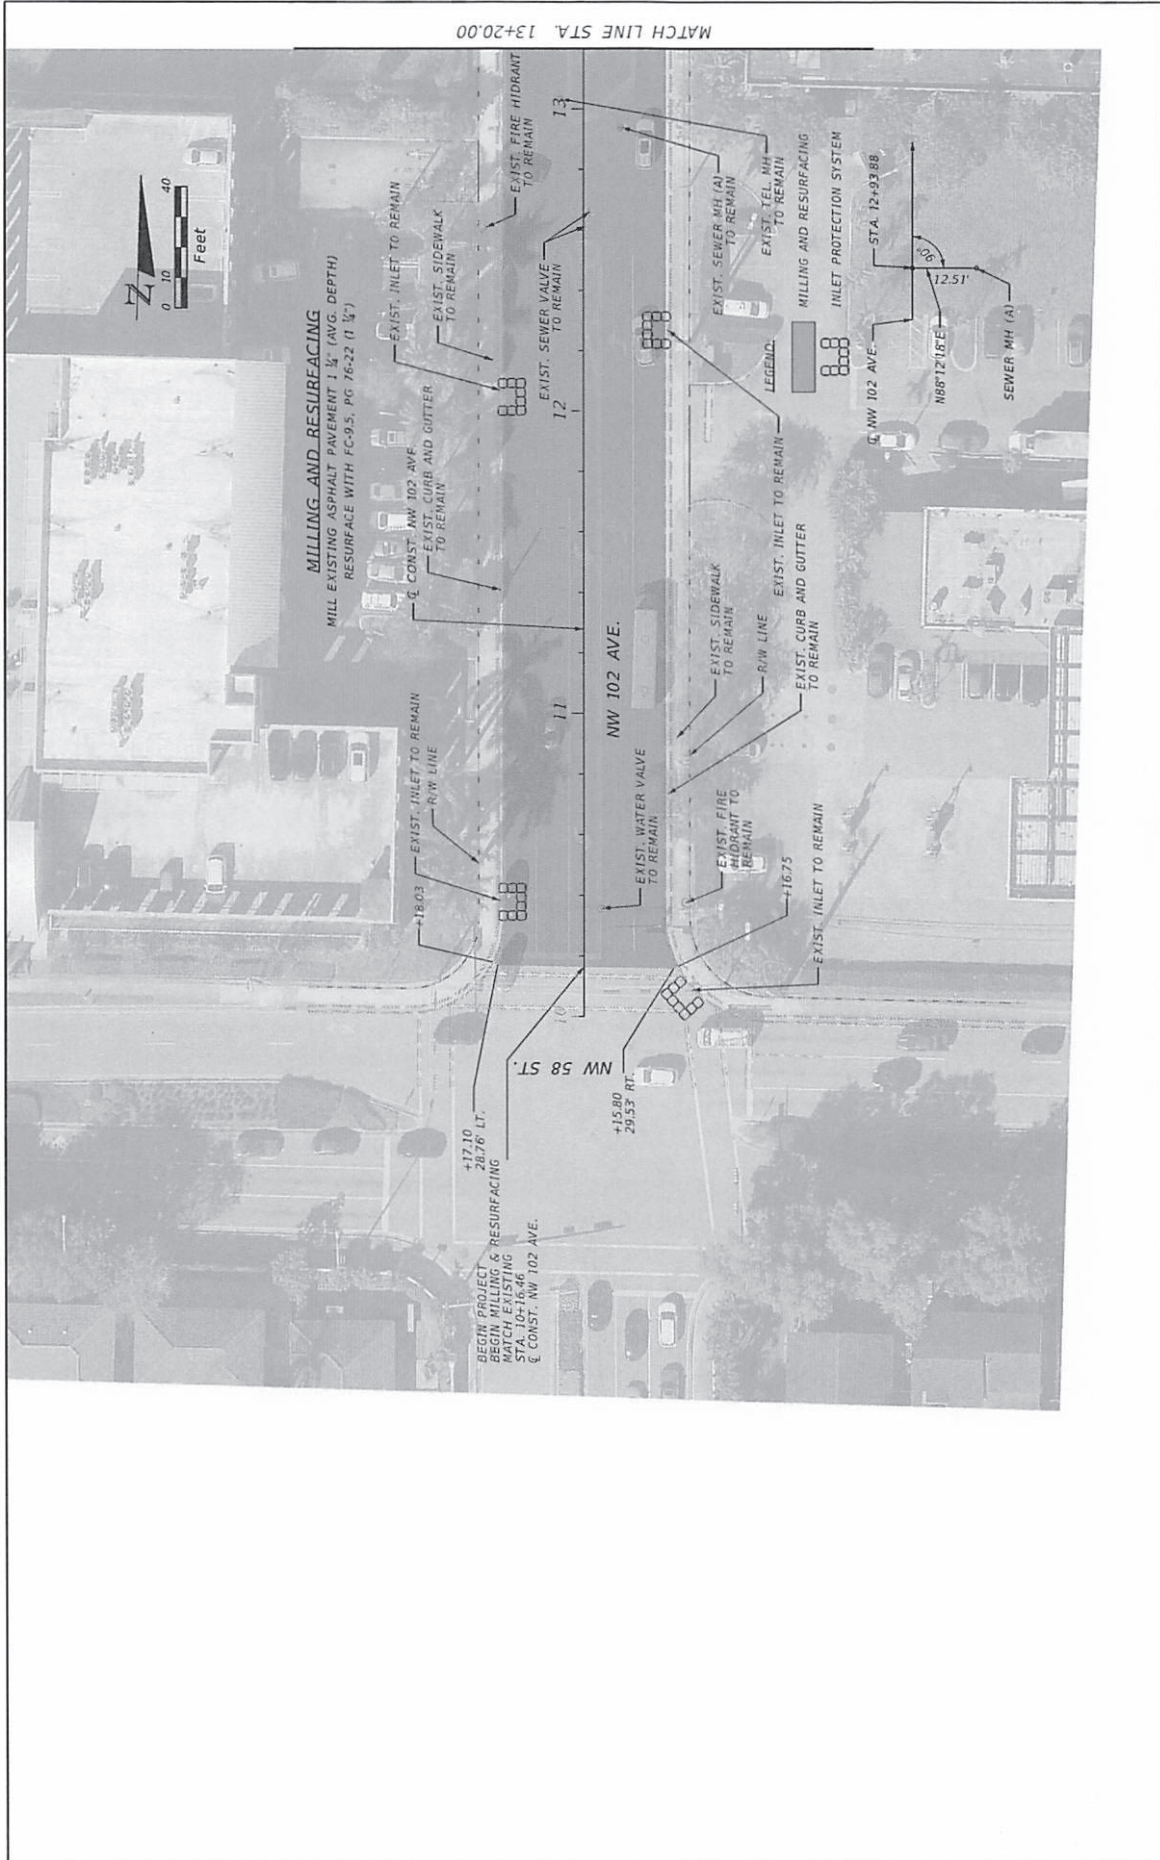

REVISIONS		DESCRIPTION	DATE
DATE	DESCRIPTION		




**MARLIN**  
ENGINEERING  
RAFAEL A. JACOBO, P.E. No. 53432  
3363 W Commercial Blvd, Ste. 116, Ft. Lauderdale, FL 33309  
(954) 926-5050 • Ca. No. 6104

**CITY OF DORAL**

**ROADWAY PLANS**

SHEET NO.  
**C-4**

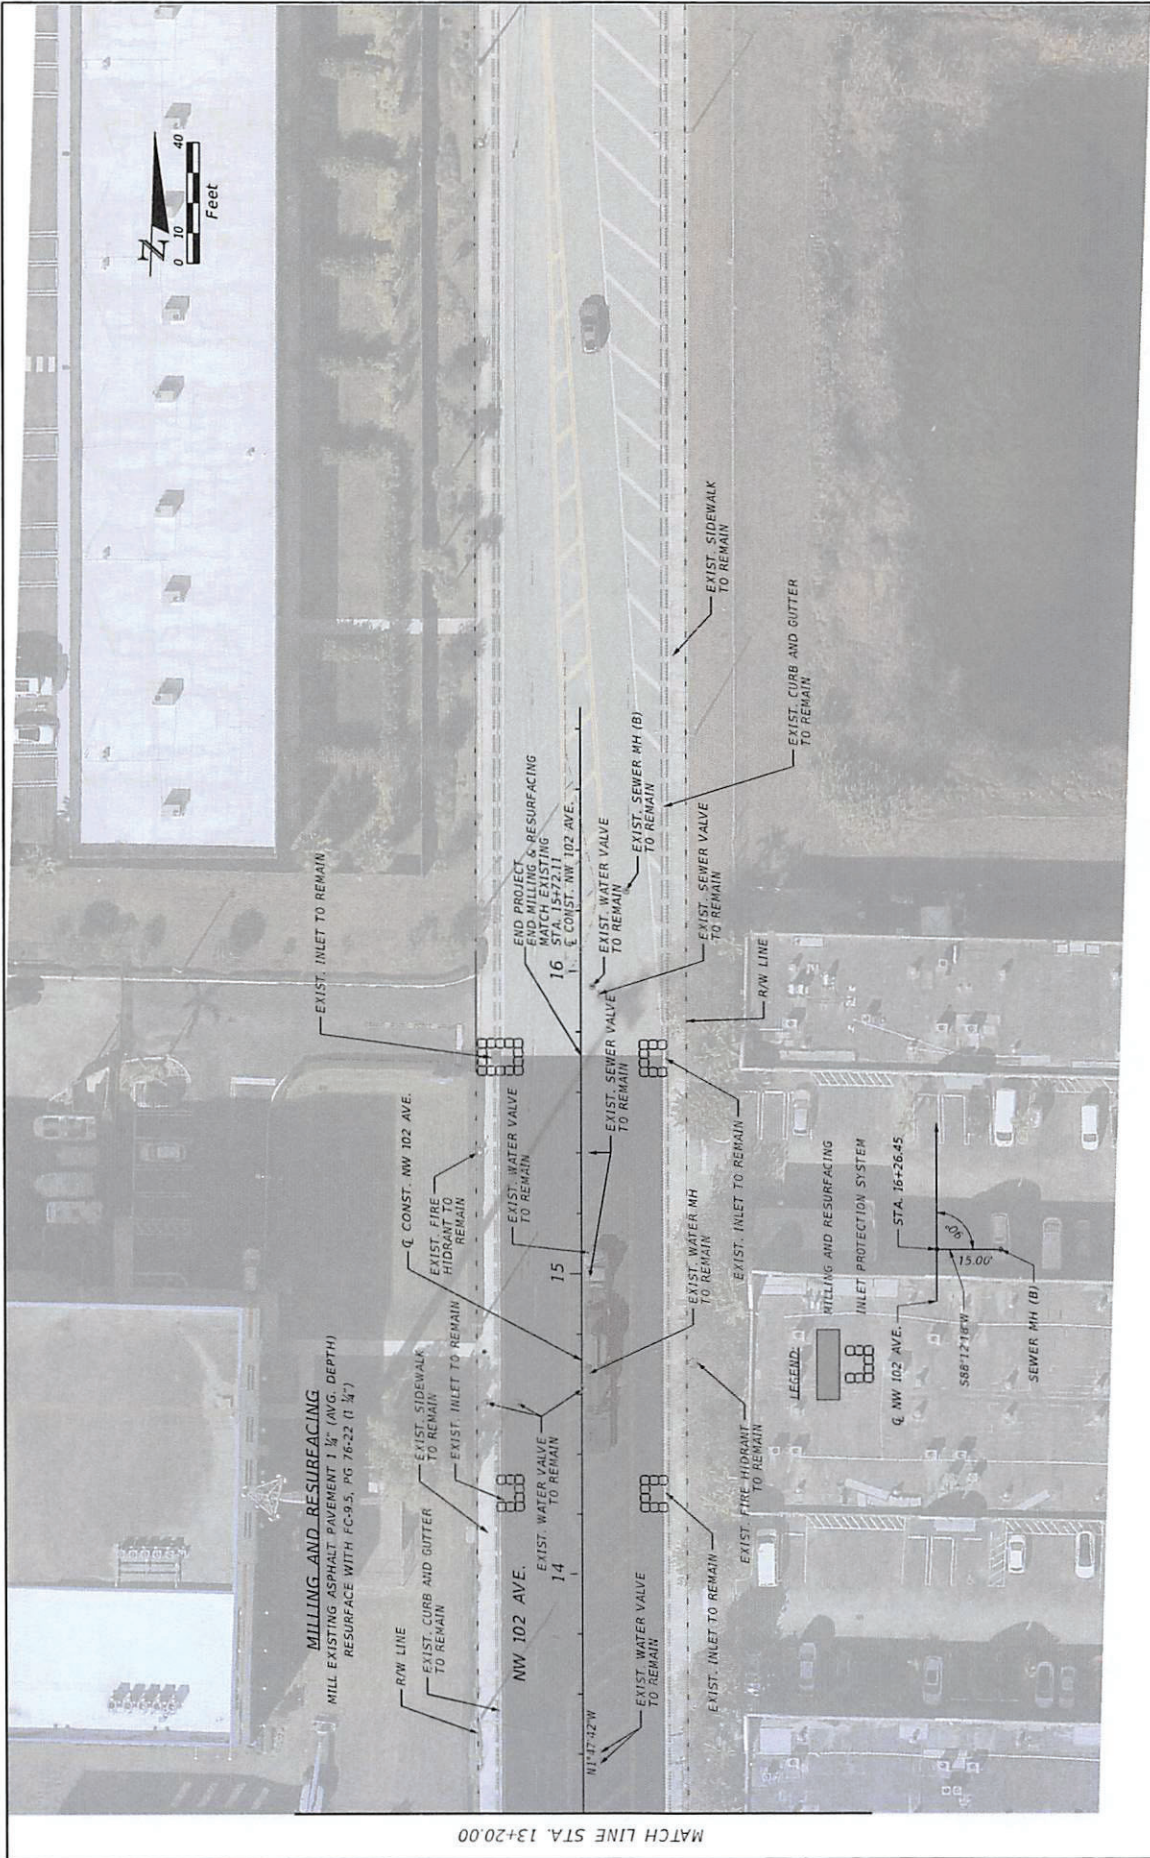



REVISIONS		DESCRIPTION	
DATE	DESCRIPTION	DATE	DESCRIPTION



**MARLIN**  
ENGINEERING  
RAFAEL A. LAGOS, P.E. No.: 51412  
3363 W Commercial Blvd., Ste. 116 Ft. Lauderdale, FL 33309  
1951 FIDC0559 • CA. No. E104

**CITY OF DORAL**  
**ROADWAY PLANS**

SHEET NO. C-5

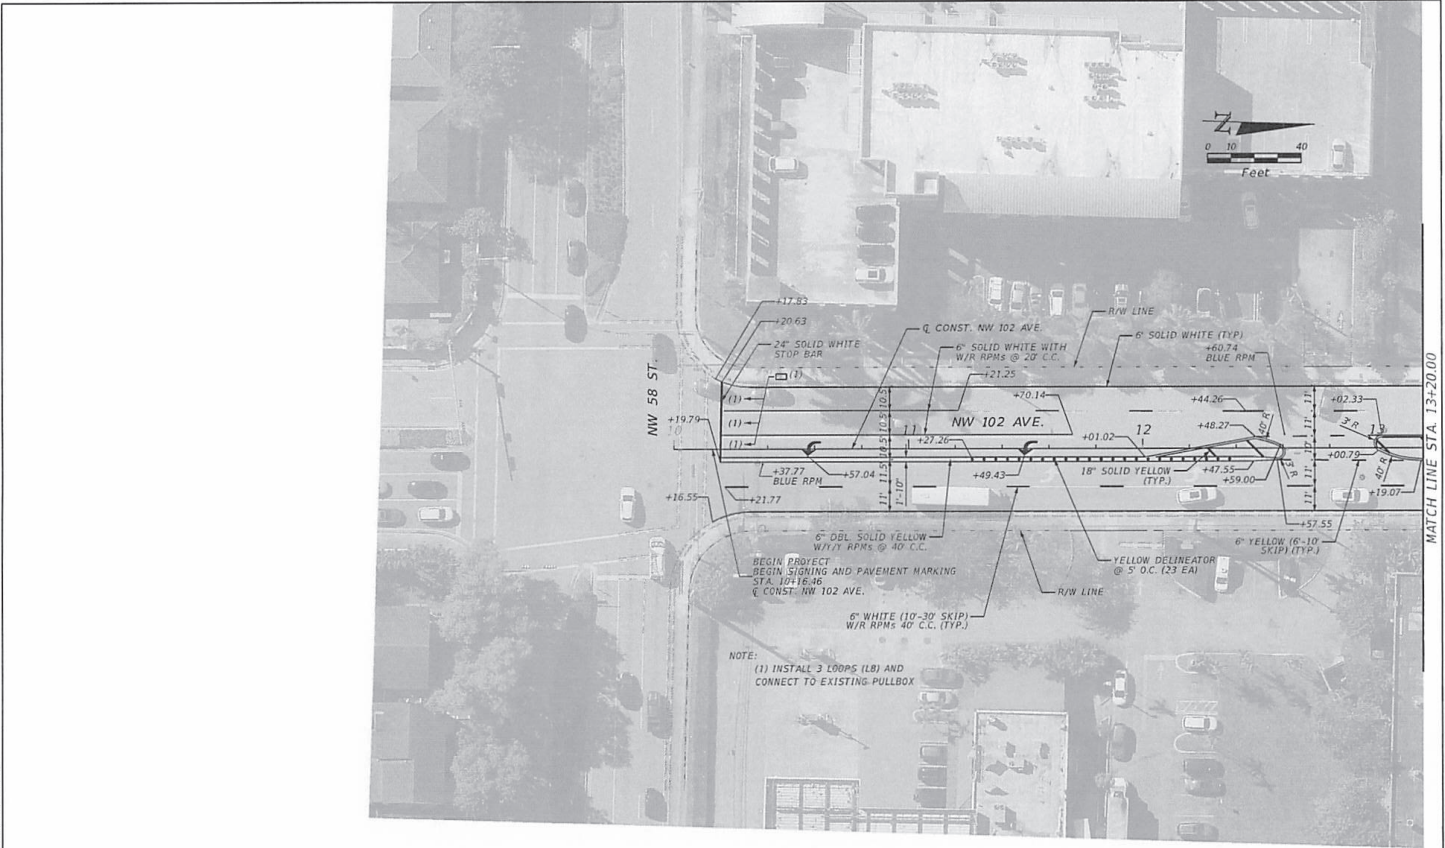

MATCH LINE STA. 13+20.00

NOTE:  
(1) INSTALL 3 LOOPS (LB) AND  
CONNECT TO EXISTING PULLBOX

11/11/2023 3:05:08 PM 8/14  
C:\STATIONWORK\117\117\117\20230416\117\117.dwg

REVISIONS	
DATE	DESCRIPTION

**MARLIN ENGINEERING**  
 RAFAEL A. LAGOS, P.E. No.: 51412  
 3363 W Commercial Blvd., Ste. 116 Ft. Lauderdale, FL 33309  
 (954) 870-5050 • CA. No. 6104

**CITY OF DORAL**

**SIGNING AND PAVEMENT MARKING PLANS**

SHEET NO.  
**C-6**

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.



DATE	DESCRIPTION	REVISIONS	DATE	DESCRIPTION



**MARLIN**  
ENGINEERING  
RAFAEL A. JAGOS, P.E. No.: 51412  
3363 W Commercial Blvd, Ste. 116 Ft Lauderdale, FL 33309  
(954) 870-5500 • CA. No. 6194

**CITY OF DORAL**

**SIGNING AND PAVEMENT MARKING PLANS**

SHEET NO. C-7



**H & J Asphalt, Inc**  
Bid Sheet

**RFQ No. 2022-13 Milling, Resurfacing, and Striping Construction Services**

PROJECT: RFQ No. 2022-13 Milling, Resurfacing, and Striping Construction Services  
LOCATION: (WO#13) NW 102nd Avenue (58th St to approx. 60th)

Contract Amount: \$149,882.70  
10% Contingency: \$13,625.70  
Total: \$149,882.70

RFQ No. 2022-13 Milling, Resurfacing, and Striping Construction Services								Invoice 1		Invoice 2		
Item No.	Description	Estimated Quantity	Unit	Unit Price	Scheduled Value	Total Spent	Completed %	Total Qty.	QTY	Total	QTY	Total
<b>Mobilization - Maintenance of Traffic</b>												
101-1	Mobilization-Demobilization (includes dust control methods)	1	LS	\$ 9,000.00	\$ 9,000.00		0.00%	0.00		\$ -		\$ -
102-1	Maintenance of Traffic (Includes traffic control, pedestrian and vehicles access, signs, barricades, and flagger, as per FDOT Standards, lighting, and steel plates if required)	1	LS	\$ 10,500.00	\$ 10,500.00		0.00%	0.00		\$ -		\$ -
<b>Milling and Resurfacing - Structural</b>												
104-18	Furnish and Install Erosion Control	8	EA	\$ 300.00	\$ 2,400.00		0.00%	0.00		\$ -		\$ -
107-1	Litter Removal	0.27	AC	\$ 3,500.00	\$ 945.00		0.00%	0.00		\$ -		\$ -
110-4-10	Remove existing Sidewalk (4" thick, 6" thick at driveways) (Includes removal of handicap ramps, meter/valve box adjustment, and disposal of materials)	120	SY	\$ 35.00	\$ 4,200.00		0.00%	0.00		\$ -		\$ -
327-70-12	Milling of existing Asphalt Pavement, 1.25" Avg. depth	3627	SY	\$ 4.00	\$ 14,508.00		0.00%	0.00		\$ -		\$ -
334-1	Asphalt Driveway - Remove /Replace (1.5" SP-9.5), includes demolition, disposal, prep. subbase, add lime-rock base if necessary for proper compaction. (Estimated 2TN of asphalt install)	23	SY	\$ 75.00	\$ 1,725.00		0.00%	0.00		\$ -		\$ -
337-7-82	Asphalt Concrete Friction Course, Traffic C, FC-9.5, PG 76-22	250	TN	\$ 160.00	\$ 40,000.00		0.00%	0.00		\$ -		\$ -
425-5	Adjust Existing Utility Manhole/Vault (Street or Sidewalk)	1	EA	\$ 1,250.00	\$ 1,250.00		0.00%	0.00		\$ -		\$ -
425-6	Adjust Existing Utility Valve Box (Street or Sidewalk)	5	EA	\$ 950.00	\$ 4,750.00		0.00%	0.00		\$ -		\$ -
425-7	Remove/Replace Existing 2'X4' Concrete Water Meter Vault/Box	1	EA	\$ 650.00	\$ 650.00		0.00%	0.00		\$ -		\$ -
520-1-10	Concrete Curb & Gutter, Type F; includes demolition, disposal, prep. Subbase, add lime-rock base if necessary for proper compaction.	50	LF	\$ 85.00	\$ 4,250.00		0.00%	0.00		\$ -		\$ -
520-1-11	Concrete Curb & Gutter, "Drop Curb"; includes demolition, disposal, prep. Subbase, add lime-rock base if necessary for proper compaction.	10	LF	\$ 120.00	\$ 1,200.00		0.00%	0.00		\$ -		\$ -
522-2	Construct new sidewalks (6" thick at driveway) (Includes cut and fill, sub-grade prep., ADA compliant handicap ramps, etc.)	60	SY	\$ 120.00	\$ 7,200.00		0.00%	0.00		\$ -		\$ -
	Construct new sidewalks (4" thick at driveway) (Includes cut and fill, sub-grade prep., ADA compliant handicap ramps, etc.)	60	SY	\$ 100.00	\$ 6,000.00		0.00%	0.00		\$ -		\$ -
630-2-12	Conduit, Furnish & Install, Directional Bore	10	LF	\$ 150.00	\$ 1,500.00		0.00%	0.00		\$ -		\$ -
660-1-109	Loop Detector Inductive, F&I, Type 9	2	EA	\$ 950.00	\$ 1,900.00		0.00%	0.00		\$ -		\$ -
660-2-106	Loop Assembly, F&I, Type F	3	AS	\$ 2,500.00	\$ 7,500.00		0.00%	0.00		\$ -		\$ -
<b>Striping - Signage</b>												
700-1-60	Single Post Sign, Remove	1	AS	\$ 150.00	\$ 150.00		0.00%	0.00		\$ -		\$ -
705-11-1	Delineator, Flexible Tubular, Yellow	23	EA	\$ 125.00	\$ 2,875.00		0.00%	0.00		\$ -		\$ -
706-1-3	Raised Pavement Marker, Type B	193	EA	\$ 6.00	\$ 1,158.00		0.00%	0.00		\$ -		\$ -
710-11-101	Painted Pavement Marking, Standard-Other Surfaces, White, Solid, 6"	0.258	GM	\$ 2,800.00	\$ 722.40		0.00%	0.00		\$ -		\$ -
710-11-125	Painted Pavement Marking, Standard Other Surfaces, White, Solid, 24"	35	LF	\$ 10.00	\$ 350.00		0.00%	0.00		\$ -		\$ -
710-11-131	Painted Pavement Marking, Standard-Other Surfaces, White, Solid, 6", 10-30 Skip or 3-9 Lane Drop	0.190	GM	\$ 1,500.00	\$ 285.00		0.00%	0.00		\$ -		\$ -
710-11-170	Painted Pavement Marking, Standard, White Arrows	6	EA	\$ 80.00	\$ 480.00		0.00%	0.00		\$ -		\$ -
710-11-201	Painted Pavement Marking, Standard-Other Surfaces, Yellow, Solid, 6"	0.217	GM	\$ 3,200.00	\$ 694.40		0.00%	0.00		\$ -		\$ -
710-11-224	Painted Pavement Marking, Standard, Yellow, Solid, 18" for Diagonal or Chevron	57	LF	\$ 15.00	\$ 855.00		0.00%	0.00		\$ -		\$ -
710-11-231	Painted Pavement Marking, Standard-Other Surfaces, Yellow, Solid, 6", 10-30 Skip or 3-9 Lane Drop	0.054	GM	\$ 3,500.00	\$ 189.00		0.00%	0.00		\$ -		\$ -
710-11-241	Painted Pavement Marking, Standard, Yellow, 2-4 Dotted Guide Line/6-10 Dotted Extension Line, 6"	0.070	GM	\$ 3,000.00	\$ 210.00		0.00%	0.00		\$ -		\$ -
711-11-101	Thermoplastic, Standard-Other Surfaces, White, Solid, 6"	0.258	GM	\$ 7,000.00	\$ 1,806.00		0.00%	0.00		\$ -		\$ -
711-11-125	Thermoplastic, Standard Other Surfaces, White, Solid, 24"	35	LF	\$ 20.00	\$ 700.00		0.00%	0.00		\$ -		\$ -
711-11-131	Thermoplastic, Standard-Other Surfaces, White, Solid, 6", 10-30 Skip or 3-9 Lane Drop	0.190	GM	\$ 8,500.00	\$ 1,615.00		0.00%	0.00		\$ -		\$ -
711-11-170	Thermoplastic, Standard, White Arrows	6	EA	\$ 180.00	\$ 1,080.00		0.00%	0.00		\$ -		\$ -
711-11-201	Thermoplastic, Standard-Other Surfaces, Yellow, Solid, 6"	0.217	GM	\$ 7,200.00	\$ 1,562.40		0.00%	0.00		\$ -		\$ -
711-11-224	Thermoplastic, Standard, Yellow, Solid, 18" for Diagonal or Chevron	57	LF	\$ 20.00	\$ 1,140.00		0.00%	0.00		\$ -		\$ -
711-11-231	Thermoplastic, Standard-Other Surfaces, Yellow, Solid, 6", 10-30 Skip or 3-9 Lane Drop	0.054	GM	\$ 7,200.00	\$ 388.80		0.00%	0.00		\$ -		\$ -
711-11-241	Thermoplastic, Standard, Yellow, 2-4 Dotted Guide Line/6-10 Dotted Extension Line, 6"	0.070	GM	\$ 7,400.00	\$ 518.00		0.00%	0.00		\$ -		\$ -
<b>Sub-Total</b>					<b>\$ 136,257.00</b>	<b>\$ -</b>	<b>0.00%</b>	<b>0.00</b>		<b>\$ -</b>		<b>\$ -</b>
<b>Contingencies Withdraws</b>												
No.	Description	Estimated Quantity	Unit	Unit Price	Scheduled Value	Total Spent	Completed %	Total Qty.		Total		Total
1	10% Contingency	1.00	LS		\$ 13,625.70		0.00%	0.00		\$ -		\$ -
<b>Sub-Total</b>					<b>\$13,625.70</b>	<b>\$ -</b>	<b>0.00%</b>	<b>0.00</b>		<b>\$ -</b>		<b>\$ -</b>
<b>Grand Total</b>					<b>\$ 149,882.70</b>	<b>\$ -</b>	<b>0.00%</b>	<b>0.00</b>		<b>\$ -</b>		<b>\$ -</b>
Invoiced										\$ -		\$ -
Invoiced to Date										\$0.00		\$ -

**RESOLUTION No. 24-03**

**A RESOLUTION OF THE MAYOR AND THE CITY COUNCIL OF THE CITY OF DORAL, FLORIDA, APPROVING WORK A ORDER WITH HJ ASPHALT, INC. FOR THE PROVISION OF MILLING, RESURFACING, AND STRIPING CONSTRUCTION SERVICES ALONG NW 102 AVENUE FROM NW 58 STREET TO APPROXIMATELY NW 60 STREET, AS PER PLANS PROVIDED, IN AN AMOUNT NOT TO EXCEED \$149,882.70 WHICH INCLUDES A 10% CONTINGENCY FOR ANY UNFORESEEN CONDITIONS; RECOGNIZING THAT HJ ASPHALT, INC. IS A PRE-QUALIFIED VENDOR; AUTHORIZING THE CITY MANAGER TO EXECUTE THE WORK ORDER AND EXPEND BUDGETED FUNDS ON BEHALF OF THE CITY; PROVIDING FOR IMPLEMENTATION; AND PROVIDING FOR AN EFFECTIVE DATE**

**WHEREAS**, on April 21, 2022, the City of Doral (“City”) issued and advertised Request for Qualification No. 2022-13 “Milling, Resurfacing, and Striping Construction Services” (the “RFQ”); and

**WHEREAS**, the evaluation committee recommended that the City Council award the RFQ to the top four (4) ranked firms, H&J Asphalt, Inc., H&R Paving, Inc., Weekley Asphalt Paving, Inc., and General Asphalt; and

**WHEREAS**, in August of 2022, pursuant to Resolution No. 22-144, the City Council accepted the recommendation of the evaluation committee and awarded the RFQ to aforementioned firms, thereby establishing a pool of construction firms for “Milling, Resurfacing, and Striping Construction Services” (“Pre-qualified Pool of Firms”); and

**WHEREAS**, the Public Works Department (“PWD”) is in need if a firm to provide Milling, Resurfacing, and Striping along NW 102<sup>nd</sup> Avenue between NW 58<sup>th</sup> Street and approximately NW 60th Street (the “Work”); and

**WHEREAS**, the PWD requested a proposal from the Pre-qualified Pool of Firms for the Work; and

**WHEREAS**, H&J Asphalt, Inc. provided the attached proposal and was deemed the lowest bid proposal with a not to exceed amount of \$149,882.70 which includes a 10% contingency for any unforeseen conditions; and

**WHEREAS**, the City Manager's Office respectfully requests that the Mayor and the City Councilmembers approve Work Order No. 13 for H&J Asphalt, Inc., a copy of which is attached hereto as Exhibit "A", for the provision of Milling, Resurfacing, and Striping along NW 102<sup>nd</sup> Avenue between NW 58<sup>th</sup> Street and approximately NW 60<sup>th</sup> Street in an amount not to exceed \$149,882.70, which includes a 10% contingency for any unforeseen conditions; and

**WHEREAS**, funding for this request is available in the Public Works Transportation Fund, Account Num. 101.80005.500633.

**NOW, THEREFORE, BE IT RESOLVED BY THE MAYOR AND THE CITY COUNCIL OF THE CITY OF DORAL AS FOLLOWS:**

**Section 1. Recitals.** The above recitals are confirmed, adopted, and incorporated herein and made part hereof by this reference.

**Section 2. Approval.** The City Council hereby approves Work Order No. 13 to H&J Asphalt, Inc., for Milling, Resurfacing, and Striping along NW 102<sup>nd</sup> Avenue between NW 58<sup>th</sup> Street and approximately NW 60<sup>th</sup> Street, in an amount not to exceed \$149,882.70, which includes a 10% contingency for any unforeseen conditions, a copy of

which is attached hereto as Exhibit "A", together with such non-material changes as may be acceptable to the City Manager and approved as to form and legal sufficiency by the City Attorney.

**Section 3. Authorization.** The City Manager is authorized to execute the work order and expend budgeted funds on behalf of the City in an amount not to exceed \$149,882.70.

**Section 4. Implementation.** The City Manager and the City Attorney are hereby authorized to take such further action as may be necessary to implement the purpose and the provisions of this Resolution.

**Section 5. Effective Date.** This Resolution shall take effect immediately upon adoption.

The foregoing Resolution was offered by Vice Mayor Puig-Corve who moved its adoption.  
The motion was seconded by Councilmember Pineyro and upon being put to a vote, the  
vote was as follows:

Mayor Christi Fraga	Yes
Vice Mayor Oscar Puig-Corve	Yes
Councilwoman Digna Cabral	Yes
Councilman Rafael Pineyro	Yes
Councilwoman Maureen Porras	Yes

PASSED AND ADOPTED this 10 day of January, 2024.



CHRISTI FRAGA, MAYOR

ATTEST:



CONNIE DIAZ, MMC  
CITY CLERK

APPROVED AS TO FORM AND LEGAL SUFFICIENCY  
FOR THE USE AND RELIANCE OF THE CITY OF DORAL ONLY:



VALERIE VICENTE, ESQ. for  
NABORS, GIBLIN & NICKERSON, P.A.  
CITY ATTORNEY